




The germ catcher

Optimāla aizsardzība visām aukstā ūdens sistēmām

Augsta dzeramā ūdens kvalitāte Eiropā tiek nodrošināta ar tiesiskajiem aktiem un regulāru ūdensapgādes sistēmu pārbaudi. Tomēr pat labas kvalitātes dzeramais ūdens var tikt ietekmēts ar negaidītām problēmām, piemēram, pēkšņu cietu daļiņu iekļūšanu vai baktēriju piesārņojumu. Šo problēmu cēlonis dažkārt ir publiskais cauruļvadu tīkls, citkārt – iekārtas attiecīgajā ēkā. Neatkarīgi no tā, kāda ir pamatproblēma, dzeramā ūdens sistēmas un ūdens padeves iekārtas ātri piepildās ar baktērijām un ir jāiztīra. Šajā gadījumā BWT bestcare nodrošina optimālu aizsardzību. Tiek samazināts baktēriju un cietu daļiņu saturs ūdenī, kā arī nevēlamā smarža vai garša (hlors). BWT bestcare ir kā apdrošināšanas polise jūsu ūdenim!

Kur var izmantot BWT bestcare?


BWT bestcare ir ideāls risinājums visām ūdens padeves iekārtām, bet to var izmantot arī visur, kur aukstajam ūdenim jābūt drošam dzeršanai tieši lietošanas vietā.

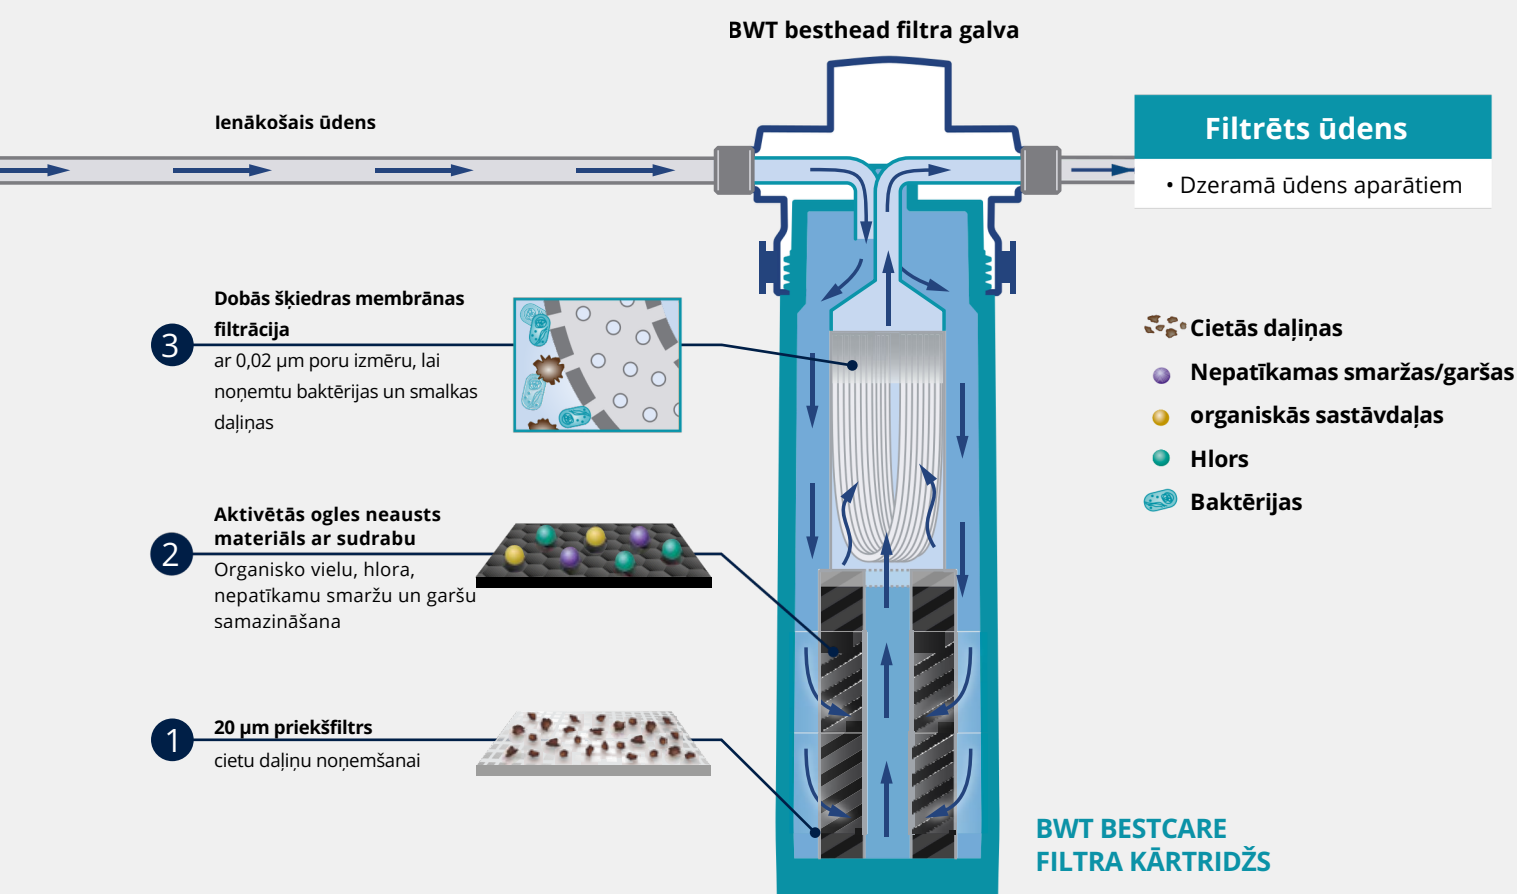

TEHNISKIE DATI

Filtra izmērs	S
Filtra kapacitāte litros / mēnešos	12.000/6*
Nominālais plūsmas ātrums [l/h]	200
Spiediena zudums pie nominālā plūsmas ātruma [bar]	0,8
Ultrafiltrācijas membrānas poru izmērs [µm]	0,02
Plūsmas spiediens [bar]	3 – 5
Transportēšanas/uzglabāšanas vides temperatūra [°C]	-20 – 40
Kopējais augstums bez kronšteina (A) mm	368
Savienojuma augstums (B) mm	307
Ø filtra kārtiņam (C) mm	88
Aptuvenais svars kg (sauss/ar ūdeni)	1,0/1,2
Filtra kārtiņņa pasūtījuma nr.	FS22B00A00

* Ieteikums: Regulāri nomainiet filtrējošo kārtiņņu ik pēc 6 mēnešiem vai kad filtrs ir sasniegjis savu kapacitāti. Informācija var tikt mainīta.

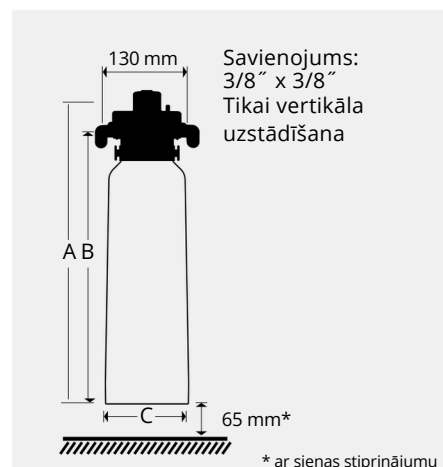

BWT BESTCARE – THE GERM CATCHER

Galvenās priekšrocības

- » Aprīkojuma aizsardzība, piemēram, dzeramā ūdens iekārtas
- » Integrēts priekšfiltrs ilgai kalpošanai un vienmēr kristāldzīdam ūdenim
- » Ideāli piemērots cietu daļiņu, organisko komponentu un suspendētu cieto vielu atdalīšanai
- » Nevēlamas garšas un smaržas (hlora) samazināšana
- » Droša profilakse pret baktēriju piesārņojumu

Tehniskie parametri

- » Dobās šķiedras membrānas filtrācija ar 99,9999 % (log 6) baktēriju aizturēšanu, piemēram, legionellas un cistas
- » Cietu daļiņu, kas lielākas par 0,02 µm, aizturēšana
- » Mikroplastmasas aizturēšana
- » Sudraba aktivētā ogle, lai novērstu baktēriju vairošanos

Ekspluatācijas nosacījumi

Ienākošais spiediens:	2,5 – 8 bar
Ūdens temperatūra:	4 – 30 °C
Telpas temperatūra:	4 – 40 °C



PIEDERUMI

	Apraksts	Pasūtījuma Nr.
BWT besthead FLEX filter head	BWT besthead FLEX ar 2 savienotājiem 90°, FLEX Insert, M 3/8", izgatavots no GFP	FS00Z20A00
BWT besthead FLEX Set 1	BWT besthead FLEX ar 2 savienotājiem 90°, FLEX Insert, M 3/8" izgatavots no GFP, savienojuma šļūtene DN 8, 1,5 m, ar lodveida vārstu, FLEX ieliktnis 90° līkums izgatavots no GFP, uzgriežņa uzdeva FM 3/8", savienotājs taisns, FLEX ieliktnis x M 3/8" izgatavots no GFP, savienojums FM 3/4" x M 3/8" izgatavots no GFP	FS00Z39A00

ALTERNATĪVAIS PRODUKTS

	Apraksts	Pasūtījuma Nr.
BWT bestcare 10	BWT bestcare 10 ir piemērots visiem ūdens dispenseriem un dzeramā ūdens sistēmām – visur, kur aukstajam ūdenim ir jābūt drošam dzeršanai tieši lietošanas vietā.	125501411



RAŽOTĀJS:

BWT Holding GmbH:
Walter-Simmer-Str. 4 5310
Mondsee, Austria
bwt-wam.com

IZPLATĪTĀJS:

Baltic Water SIA
Valmieras street 43-2, Riga,
Latvia, LV-1009
info@balticwater.lv
Tel.: +371 25438039




The germ catcher

Optimum protection for all water dispensing units

The high quality of drinking water in Europe is ensured by legal regulations and the regular inspection of waterworks. However, even good drinking water can be affected by surprising problems, such as the sudden ingress of particles or bacterial contamination. The cause of these issues is sometimes the public pipeline network and other times the installations in the affected building. No matter what the underlying problem is, drinking water systems and water dispensers then quickly become full of germs and have to be thoroughly cleaned. This is where BWT bestcare offers optimum protection. The content of bacteria and particles in the water is reduced, as well as foreign odor or taste (chlorine). BWT bestcare is like insurance cover for your water!

Where can BWT bestcare be used?


BWT bestcare is the ideal solution for all water dispensing units, but it can also be used wherever cold water has to be safe to drink directly at the point of consumption.

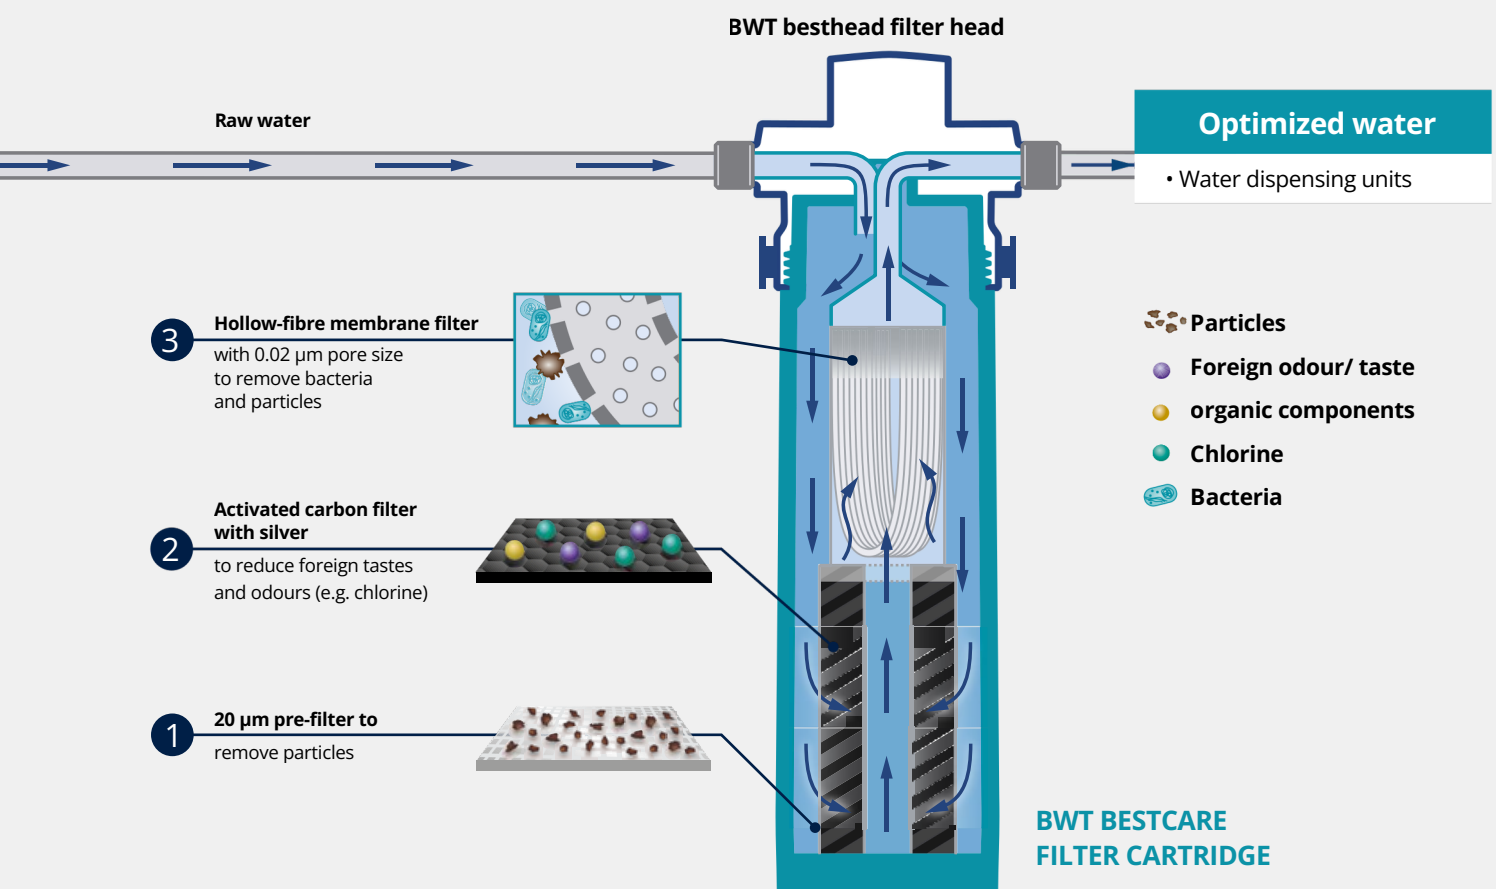

TECHNICAL DATA

Filter size	S
Maximum use [liters/months]	12.000/6*
Nominal flow rate [l/h]	200
Pressure loss at nominal flow rate [bar]	0,8
Pore size of ultra-filtration membrane [µm]	0,02
Flush volume [litres]	3 – 5
Ambient temperature during transport/storage [°C]	-20 – 40
Total height without bracket (A) in mm	368
Connection height (B) in mm	307
Ø filter cartridge (C) in mm	88
Weight in kg (dry/wet)	1,0/1,2
Order no. filter cartridge	FS22B00A00

* Recommendation: Replace the filter cartridges regularly after 6 months or when the filter capacity is reached. Subject to change.

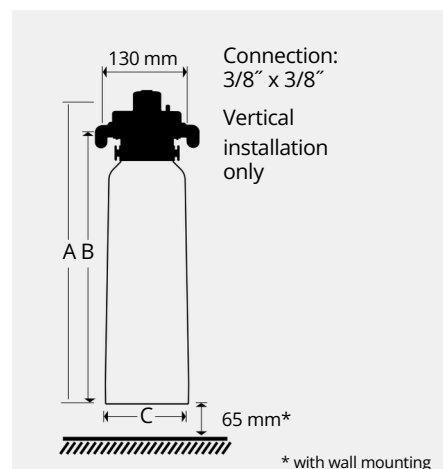

BWT BESTCARE – THE GERM CATCHER

Main advantages

- » Protection of downstream equipment such as drinking water dispensers
- » Integrated pre-filter for long life and always crystal clear water
- » Ideal for separation of particles, organic components and suspended solids
- » Reduction of foreign taste and odor (chlorine)
- » Perfect prevention against bacterial contamination

Technical features

- » Hollow-fibre membrane filtration with 99.9999 % (log 6) retention of bacteria e.g. legionella and cysts
- » Retention of particles larger than 0.02 µm
- » Retention of microplastics
- » Silvered activated carbon block to prevent bacterial growth

Operating conditions

Inlet pressure:	2,5 – 8 bar
Water temperature:	4 – 30 °C
Ambient temperature:	4 – 40 °C



ACCESSORIES

	Description	Order number
BWT besthead FLEX filter head	BWT besthead FLEX with two 90° connectors, FLEX Insert straight connector 3/8" made of fibreglass	FS00Z20A00
BWT besthead FLEX Set 1	BWT besthead FLEX with two 90° connectors, FLEX Insert straight connector 3/8" made of fibreglass, DN 8 connection hose, 1.5 m, with ball valve, 90° FLEX Insert made of fibreglass, Internally threaded union nut 3/8", straight connector, FLEX Insert x straight connector 3/8" made of fibreglass, internally threaded reducer 3/4" x straight connector 3/8" made of fibreglass	FS00Z39A00



ALTERNATIVE PRODUCT

	Description	Order number
BWT bestcare 10	BWT bestcare 10 is suitable for all water dispensing units - wherever cold water has to be safe to drink directly at the point of consumption.	125501411



MANUFACTURER:

BWT Holding GmbH:
Walter-Simmer-Str. 4 5310
Mondsee, Austria
bwt-wam.com

SALES:

Baltic Water SIA
Valmieras street 43-2, Riga,
Latvia, LV-1009
info@balticwater.lv
Tel.: +371 25438039